


Toolholders for S-inserts

Snap-Tap



- Inserts, please see pages 31, 33, 36-37, 40-41, 42, 44-45, 46, 48, 49, 50, 52, 54, 56, 57, 58, 59, 60

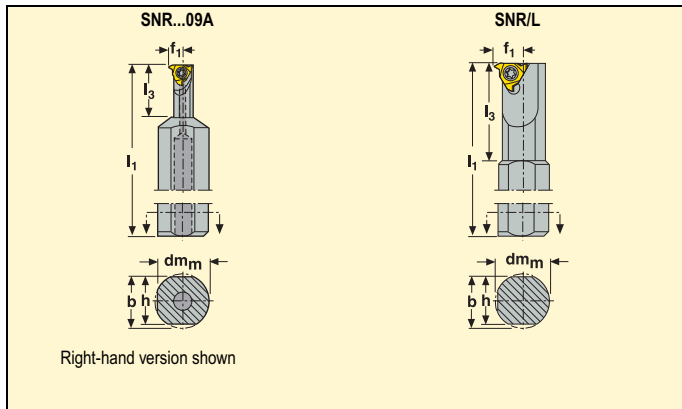

Application	Part No.	Dimensions in mm								KG		
		dm _m	h	b	l ₁	l ₃	f ₁	D _m min	D _m min*			
	09	SNR 0020L09A	20	18	19,0	140	20	5,1	10,2	–	0,3	9..
	11	SNR 0010H11	10	–	9,5	100	–	6,5	13,0	11	0,1	11..
		SNR 0010K11	16	14	15,5	125	30	5,5	12,0	11	0,2	11..
		SNR 0013L11	16	14	15,5	140	32	7,0	15,0	13	0,2	11..
		SNL 0010H11	10	–	9,5	100	–	6,5	13,0	11	0,1	11..
		SNL 0010K11	16	14	15,5	125	30	5,5	12,0	11	0,2	11..
		SNL 0013L11	16	14	15,5	140	32	7,0	15,0	13	0,2	11..
	16	SNR 0016M16	16	14	15,5	150	40	10,3	19,0	16	0,2	16..
		SNL 0016M16	16	14	15,5	150	40	10,3	19,0	16	0,2	16..
	22	SNR 0020Q22	20	18	19,0	180	45	13,0	24,0	22	0,4	22..
		SNL 0020Q22	20	18	19,0	180	45	13,0	24,0	22	0,4	22..

*D_m min, modified. Please see page 26

Spare Parts, Parts included in delivery

Toolholder/ Insert dimension	Locking screw/ Key		Coolant adapter*
...09A	C02205-T07P	T07P-2	SEAL20
...11	C02506-T07P	T07P-2	–
...16	C03508-T15P	T15P-2	–
...22	C04011-T15P	T15P-2	–

Please check availability in current price and stock-list

*To be ordered separately