



BSPT – External Threading

Snap-Tap®

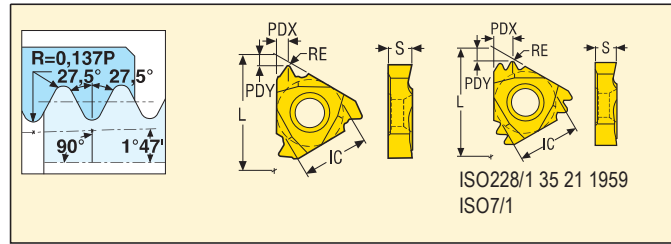


Size	Dimensions in mm		
	IC	L	S
16	9,525	16,5	3,47

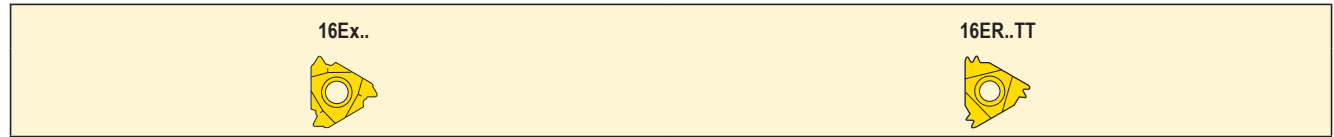


Pitch		Dimensions in mm			Insert Part No. Right	Grades					Insert Part No. Left	Grades						
mm	TPI	PDY	PDX	RE		Coated			Uncoated			Coated			Uncoated			
						CP200	CP300	CP500	H15			CP200	CP300	CP500	H15			
–	28	0,7	0,8	0,08	16ER28BSPT			■										
–	19	0,8	0,8	0,15	16ER19BSPT			■										
–	14	1,2	1,5	0,24	16ER14BSPT			■	■		16EL14BSPT			■				
–	11	1,2	1,5	0,3	16ER11BSPT			■	■		16EL11BSPT			■				
–	14	1,5	2,2	0,24	16ER14BSPT-TT			■										
–	11	1,8	2,8	0,3	16ER11BSPT-TT			■										

BSPT – Internal Threading

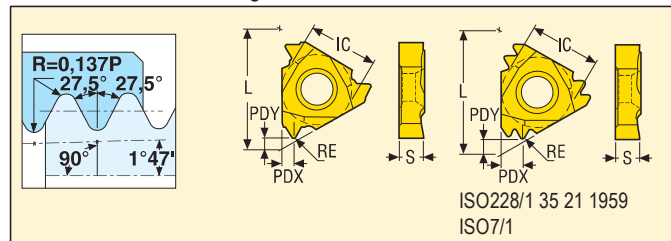

Size	Dimensions in mm		
	IC	L	S
09	5,56	9,6	2,4
16	9,525	16,5	3,47

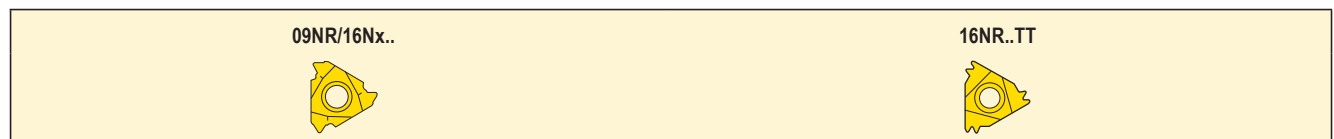

Pitch		Dimensions in mm			Insert Part No. Right	Grades					Insert Part No. Left	Grades						
mm	TPI	PDY	PDX	RE		Coated			Uncoated			Coated			Uncoated			
						CP200	CP300	CP500	H15			CP200	CP300	CP500	H15			
–	19	0,8	0,8	0,15	09NR19BSPT			■										
–	14	1,2	1,5	0,24	16NR14BSPT			■	■		16NL14BSPT			■				
–	11	1,2	1,5	0,3	16NR11BSPT			■	■		16NL11BSPT			■				
–	14	1,5	2,2	0,24	16NR14BSPT-TT			■										
–	11	1,8	2,8	0,3	16NR11BSPT-TT			■										

■ Stock standard
Subject to change refer to current price- and stock-list