


## LCMF

Tolerances:  
 CW = ±0,05  
 IGL = ±0,08  
 S = ±0,05

IGL = Distance cutting edge-rear support

Size	Inch version	Dimensions in mm		
		CW	IGL	S
1603		3,00	15,90	4,50
1604		4,00	15,90	4,50
1605		5,00	15,90	4,50
1606		6,00	15,90	4,50
1603	■	3,18	15,90	4,50
1605	■	4,76	15,90	4,50
1606	■	6,35	15,90	4,50

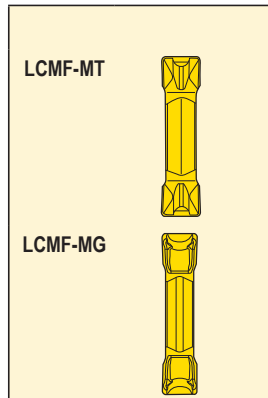

Inserts	Designation	RE	Grades																	
			Coated						Uncoated											
			CP200	CP500	CP600	TGH1050	TGK1500	TGP25	883	890										
LCMF-MT mm-version	LCMF160302-0300-MT	0,2		■																
	LCMF160304-0300-MT	0,4		■				■	■		■									
	LCMF160404-0400-MT	0,4		■				■	■											
	LCMF160408-0400-MT	0,8		■				■	■		■									
	LCMF160504-0500-MT	0,4		■				■	■											
	LCMF160508-0500-MT	0,8		■				■	■		■									
	LCMF160604-0600-MT	0,4		■				■	■											
	LCMF160608-0600-MT	0,8		■				■	■		■									
	LCMF160610-0600-MT	1,0		■					■											
LCMF-MT inch-version	LCMF160302-0318-MT	0,2		■																
	LCMF160505-0476-MT	0,5		■																
	LCMF160605-0635-MT	0,5		■								■								
LCMF-MG	LCMF160304-0300-MG	0,4		■					■											
	LCMF160404-0400-MG	0,4		■					■											
	LCMF160504-0500-MG	0,4		■					■											
	LCMF160608-0600-MG	0,8		■					■											

■ Stock standard  
 Subject to change refer to current price- and stock-list