



HSS ENDMILLS

- Slotting, Finishing, Roughing & Profiling • Short & Long Series
- General purpose & application specific geometries



Page

	124	125	127	128	129	131
	E178	E100	E102 / E225	E184	E125 / E227	E192
	•	•	•	•	•	•
					•	•
	•					
	HSS	HSS Co.8	HSS Co.8	HSS Co.8	HSS Co.8	HSS Co.8
	Br	Br	Br	TiAIN	Br	TiAIN
	N	N	N	N	N	N
	Sutton Std	JIS	JIS	DIN 844L	JIS	DIN 844K
	h6	h6	h6	h6	h6	h6

ISO	VDI	Material Group	Sutton	
P	A	Steel	N	ISO
M	R	Stainless Steel	VA	
K	F	Cast Iron	GG	
N	N	Non-Ferrous Metals, Aluminiums & Coppers	Al W	
S	S	Titaniums & Super Alloys	Ti Ni	
H	H	Hard Materials (≥ 45 HRC)	H	

^ VDI 3323 material groups can also be determined by referring to the material cross reference listing in the application guide at the back of this catalogue.

For expert tooling recommendations, go to:
www.suttonhps.com

Catalogue Code
Type of Cut: Slotting
Finishing
Universal
Roughing
Profiling
Material
Surface Finish
Sutton Designation
Standard
Shank Tolerance


ISO	VDI 3323	Material	Condition	HB	N/mm ²	124	125	127	128	129	131
P	1	Steel - Non-alloy, cast & free cutting	- 0.15 %C	A	125	440	●	●	●	●	●
	2		- 0.45 %C	A	190	640	●	●	●	●	●
	3		QT	250	840	○	○	○	○	○	○
	4	Steel - Low alloy & cast < 5% of alloying elements	- 0.75 %C	A	270	910	○	○	○	●	○
	5		QT	300	1010	○	○	○	○	○	○
	6	Steel - High alloy, cast & tool		A	180	610	●	○	●	●	●
	7		QT	275	930	○	○	○	○	○	
	8		QT	300	1010		○	○	○	○	
	9		QT	350	1180						
	10	Steel - Corrosion resistant & cast	Ferritic / Martensitic	A	200	680				○	○
	11		Martensitic	QT	240	810		○	○	○	○
12	Stainless Steel	Austenitic	AH	180	610				○	○	
13		Duplex		250	840				○	○	
14.1		Precipitation Hardening		250	840					○	
14.2	Cast Iron - Grey (GG)	Ferritic / Pearlitic		180	610	○	○	○	●	○	
14.3		Pearlitic		260	880		○	○	○	○	
15	Cast Iron - Nodular (GGG)	Ferritic		160	570	○	○	○	●	○	
16		Pearlitic		250	840		○	○	○	○	
17	Cast Iron - Malleable	Ferritic		130	460	○	○	○	○	○	
18		Pearlitic		230	780		○	○	○	○	
19	Aluminum & Magnesium - wrought alloy	Non Heat Treatable		60	210	●	●	●	○	●	
20		Heat Treatable	AH	100	360	●	●	●	○	○	
21		Non Heat Treatable		75	270	○	○	○	○	○	
22		Heat Treatable	AH	90	320	○	○	○	○	○	
23		Non Heat Treatable		130	460		○	○	○	○	
24		Free cutting, Pb > 1%		110	390		○	○	○	○	
25		Brass (CuZn, CuSnZn)		90	320			○	○	○	
26		Bronze (CuSn)		100	360		○	○	○	○	
27	Non-metallic - Thermosetting & fiber-reinforced plastics										
28	Non-metallic - Hard rubber, wood etc.										
29	High temp. alloys	Fe based	A	200	680						
30			AH	280	950						
31		Ni / Co based	A	250	840						
32			AH	350	1180						
33			C	320	1080						
34	Titanium & Ti alloys	CP Titanium		400 MPa							
35				860 MPa							
36		Alpha / Beta alloys	A	960 MPa							
37.1			AH	1170 MPa							
37.2			A	830 MPa							
37.3	Beta alloys	A	830 MPa								
37.4		AH	1400 MPa								
37.5											
38.1	Hardened steel		HT	45 HRC							
38.2			HT	55 HRC							
39.1			HT	58 HRC							
39.2			HT	62 HRC							
40	Cast Iron	Chilled	C	400	1350						
41			HT	55 HRC						●	

Condition: **A** (Annealed), **AH** (Age Hardened), **C** (Cast), **HT** (Hardened & Tempered), **QT** (Quenched & Tempered)

Roughers Woodruff Cutter, Threaded



- For cutting key seats to suit standard imperial woodruff keys



Catalogue Code	E178
Discount Group	B0709
Material	HSS
Surface Finish	Brt
Sutton Designation	General Purpose
Geometry	-
Shank Form (DIN 1835)	D
Shank Tolerance	h6

Size Ref.	BS Cutter & Key #	d ₁	l ₂	l ₁	d ₂	Item #
0204	204	1/2	1/16	2	1/2	E178 0204
0304	304	1/2	3/32	2	1/2	E178 0304
0305	305	5/8	3/32	2	1/2	E178 0305
0404	404	1/2	1/8	2	1/2	E178 0404
0405	405	5/8	1/8	2	1/2	E178 0405
0406	406	3/4	1/8	2-1/4	1/2	E178 0406
0505	505	5/8	5/32	2	1/2	E178 0505
0506	506	3/4	5/32	2-1/4	1/2	E178 0506
0507	507	7/8	5/32	2-1/2	1/2	E178 0507
0606	606	3/4	3/16	2-1/4	1/2	E178 0606
0607	607	7/8	3/16	2-1/2	1/2	E178 0607
0608	608	1	3/16	2-3/4	1/2	E178 0608
0609	609	1-1/8	3/16	2-3/4	1/2	E178 0609
0807	807	7/8	1/4	2-1/2	1/2	E178 0807
0808	808	1	1/4	2-3/4	1/2	E178 0808
0809	809	1-1/8	1/4	2-3/4	1/2	E178 0809
0810	810	1-1/4	1/4	2-3/4	1/2	E178 0810
0812	812	1-1/2	1/4	3	1/2	E178 0812
1008	1008	1	5/16	2-3/4	1/2	E178 1008
1009	1009	1-1/8	5/16	2-3/4	1/2	E178 1009
1010	1010	1-1/4	5/16	2-3/4	1/2	E178 1010
1011	1011	1-3/8	5/16	3	1/2	E178 1011
1012	1012	1-1/2	5/16	3	1/2	E178 1012
1210	1210	1-1/4	3/8	2-3/4	1/2	E178 1210
1211	1211	1-3/8	3/8	3	1/2	E178 1211
1212	1212	1-1/2	3/8	3	1/2	E178 1212



ISO	P										M			K			N										S										H																		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41						
E178	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials ● Optimal ○ Effective

Slot Drills 2 Flute, R30 N, Regular

sutton®

- For precision milling of slots & cavities
- Suitable for materials up to 1000 N/mm²
- For soft steels & non-ferrous material

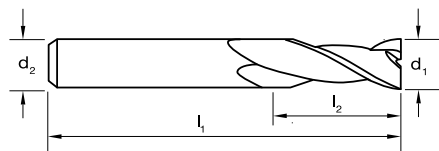

Catalogue Code	E100
Discount Group	B0502
Material	HSS Co.8
Surface Finish	Br
Sutton Designation	N
Geometry	R30
Shank Form (DIN 1835)	A
Shank Tolerance	h6

Vc Page #: 206 →

Size Ref.	d ₁ (e8)	l ₁	l ₂	d ₂	z	Item #
0159	1/16	1-31/32	1/8	1/4	2	E100 0159
0238	3/32	1-31/32	3/16	1/4	2	E100 0238
0318	1/8	1-31/32	7/32	1/4	2	E100 0318
0476	3/16	2-3/8	3/8	1/4	2	E100 0476
0635	1/4	2-9/16	9/16	1/4	2	E100 0635
0794	5/16	2-9/16	9/16	3/8	2	E100 0794
0953	3/8	2-3/4	23/32	3/8	2	E100 0953
1270	1/2	3-17/32	1	1/2	2	E100 1270
1588	5/8	3-3/4	1-3/16	5/8	2	E100 1588
1905	3/4	4-5/16	1-9/16	3/4	2	E100 1905
2540	1	4-23/32	2	3/4	2	E100 2540

ISO	P													M			K					N										S										H												
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41					
E100	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

Slot Drills 2 Flute, R30 N, Long

sutton®

- For long-reach slotting applications
- Suitable for materials up to 1000 N/mm²
- For soft steels & non-ferrous material
- TiAlN for longer tool life

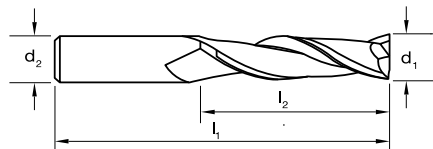

Vc Page #: 206 →

Size Ref.	d ₁ (e8)	l ₁	l ₂	d ₂	z	Item #
0300	3.0	56	12	6	2	E184 0300
0350	3.5	59	15	6	2	E184 0350
0400	4.0	63	19	6	2	E184 0400
0500	5.0	68	24	6	2	E184 0500
0600	6.0	68	24	6	2	E184 0600
0800	8.0	88	38	10	2	E184 0800
1000	10.0	95	45	10	2	E184 1000
1200	12.0	110	53	12	2	E184 1200
1400	14.0	110	53	12	2	E184 1400
1600	16.0	123	63	16	2	E184 1600
1800	18.0	123	63	16	2	E184 1800
2000	20.0	141	75	20	2	E184 2000



Catalogue Code	E184
Discount Group	B0608
Material	HSS Co.8
Surface Finish	TiAlN
Sutton Designation	N
Geometry	R30
Shank Form (DIN 1835)	A
Shank Tolerance	h6

ISO	P													M			K					N										S										H								
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41	
E184	●	●	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

Endmills 4 Flute, R30 N, Regular

sutton®

- For precision finish milling applications
- Suitable for materials up to 1000 N/mm²

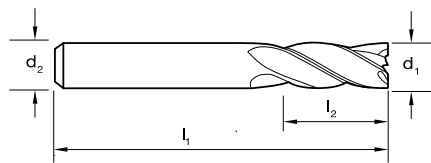

Vc Page #: 206 →

Size Ref.	d ₁ (k9)	l ₁	l ₂	d ₂	z	Item #
0159	1/16	1-31/32	1/4	1/4	4	E125 0159
0238	3/32	1-31/32	9/32	1/4	4	E125 0238
0318	1/8	1-31/32	11/32	1/4	4	E125 0318
0476	3/16	2-11/32	19/32	1/4	4	E125 0476
0635	1/4	2-11/32	19/32	1/4	4	E125 0635
0794	5/16	2-9/16	25/32	3/8	4	E125 0794
0953	3/8	2-15/16	31/32	3/8	4	E125 0953
1270	1/2	3-7/32	1-3/8	1/2	4	E125 1270
1588	5/8	3-3/4	1-9/16	5/8	4	E125 1588
1905	3/4	4-5/16	1-3/4	3/4	4	E125 1905
2223	7/8	4-5/16	1-3/4	3/4	4	E125 2223
2540	1	4-23/32	1-31/32	3/4	4	E125 2540
2541	1	4-23/32	1-31/32	1	4	E125 2541



Catalogue Code	E125
Discount Group	B0502
Material	HSS Co.8
Surface Finish	Brt
Sutton Designation	N
Geometry	R30
Shank Form (DIN 1835)	A
Shank Tolerance	h6

ISO	P													M			K					N							S							H																			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14.1	14.2	14.3	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37.1	37.2	37.3	37.4	37.5	38.1	38.2	39.1	39.2	40	41						
E125	●	●	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective

Roughers NR (normal), R30 WN, Regular



- For roughing applications
- NR geometry allows for heavy cuts
- Suitable for materials up to 1000 N/mm²
- TiCN for longer tool life

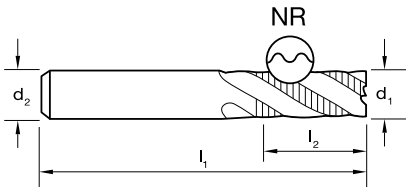

Catalogue Code	E143
Discount Group	B0404
Material	HSS Co.8
Surface Finish	TiCN
Sutton Designation	WN
Geometry	R30 NR
Shank Form (DIN 1835)	A
Shank Tolerance	h6

Size Ref.	d ₁ (js14)	l ₁	l ₂	d ₂	z	Item #
0600	6.0	60	15	10	3	E143 0600
0800	8.0	65	20	10	3	E143 0800
1000	10.0	75	25	10	4	E143 1000
1200	12.0	80	30	12	4	E143 1200

ISO	P													M			K			N							S							H								
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
E143	●	●	○	○	○	○	○	○																																		

P Steel M Stainless Steel K Cast Iron N Non-Ferrous Metals S Titanium & Super Alloys H Hard Materials

● Optimal ○ Effective



Scan to
watch the video



Performance Unequaled... Harmony Endmills

The Harmony range of Endmills represents world's latest technologies to provide increases in both performance and tool life. The key to successful milling is to minimise or eliminate the harmonic vibration produced in the cutting action.

The Harmony Endmill overcomes vibration, through the latest technologies in tool engineering:

- Premium Grade Carbide
- AlCrN Coating
- 35/38° Variable Helix
- 45° Corner Chamfering
- Gash grind of the endteeth
- Post grind treatment of cutting edges

The bottom line for you:

- Longer tool life
- Improved surface finish
- Increased productivity
- Reduced production costs

