



HOLESAWING

- Bi-Metal Cobalt • TCT Multi-Purpose • Impact
- Annular Cutters • Diamond • Arbors & Pilot Drills

HOLESAWING

Holesawing Index

161	Holesaws Annular Cutters	157	Holesaws HSS
170	Holesaws Arbors & Accessories	156	Holesaws Impact Bi-Metal
169	Holesaws Arbor Selection Chart	168	Holesaws Multi-Function Adjustable Ceiling Hole Cutter
153	Holesaws Bi-Metal – Cobalt	171	Holesaws Quick Release Arbor
152	Holesaws Bi-Metal – Cobalt ULTRA	148	Holesaws Selection Chart
165	Holesaws Bi-Metal HSS & TCT Sets	158	Holesaws TCT
151	Holesaws Bi-Metal Sets	155	Holesaws TCT – Multi-Purpose
167	Holesaws Carbide Grit	151	Holesaws TCT Multi-Purpose Sets
154	Holesaws Carbide Tipped	160	Holesaws TCT – Pro (Long)
164	Holesaws Diamond Core Bit M14	159	Holesaws TCT – Pro (Short)
163	Holesaws Diamond Grit		
165	Holesaws DIY Sets		

Holesaws Selection Chart

sutton

	Item #	Size Range	Page No.	Wood										Metal		
				Soft Wood	Hard Wood	Wood & Nails	Chipboard	Plywood	MDF	Green Wood	Sandwich Construction	Pallet	Window Frame	Steel	Stainless Steel	Aluminium
	H105	Ultra Cobalt Bi-Metal 14-152mm	152	○	○	○	○	○					○	●	○	●
	H125	Heavy Duty Bi-Metal 14-152mm	153	○	○	○	○	○					○	●	○	●
	H128	Carbide Tipped 22-102mm	154	○	○	○	○	○	○					●	●	●
	H127	TCT Multi-Purpose 16-152mm	155	●	●		●	●	●	●	●	○	●			○
	H119	Impact Bi-Metal 12-60mm	156											○		○
	H101	HSS 16-50mm	157											●	○	●
	H117	TCT-Long 16-50mm	158	○	○		○	○	○					●	○	●
	H108	TCT-Short 16-75mm	159	●	○		●	○	○					●*	○	
	H113	TCT-Long 19-75mm	160													
	H180 H181 H182	Annular Cutters 12-65mm	161 161 162											●	●	○
	H115	Diamond Grit 19-105mm	163													
	H116	Diamond Core M14 5-105mm	164													

● Optimal ○ Effective

*Cutting Fluid Required (Item#: M800 0250)

Metal				Masonry											Glass, Tile & Plastics					
Copper & Brass	Cast Iron	Sheet Metal	Metal Pipe	Masonry	Plasterboard	Compressed Fibre Cement	Cement Sheet	Ceramic Tile	Hebel	Brick	Stone	Concrete	Granite	Marble	PVC Plastic	Acrylic	Fibreglass	Carbon Fibre	Glass	Laminate
●	●	●	○		○										●					○
●	●	●	○		○										●					○
●	●	●	●												●		●			●
○				○	●	●	●	●	○	○					●	●	●	○		●
		●													●					
●	○	●																		
●		●													○	○	○			○
					○	○	○								○		○		○	
○	●																			
							○	●			○		●	●	●	●	●	●	○	●
								●	○	○	○		●	●			●	●		●

Holesaws Sets

sutton

Ultra Cobalt Bi-Metal Holesaw Sets



H105 S5



H105 S14



H105 S9

Heavy Duty Bi-Metal Holesaw Sets



H125 SS07A



H125 SE09A



H125 SE11A



H125 SP07A



H125 SP12A



H125 SC12A



H125 SG12A



H125 SG13A



H125 SG26A



H125 SL06A

TCT Multi-Purpose Holesaw Sets



H127 MP4



H127 MP6



H127 MP7



H127 MP9

Holesaws Bi-Metal Sets

sutton

A selection of sets are available to suit a variety of applications and provide the most common and popular sizes.

Application

DIY	General Contracting
Trade	Woodworking
Automotive	Metalworking
Electrical	Machine Shop
Plumbing	MRO
Carpentry	

Product Group: C0402

Product Information				Item #	Barcode
Description	Arbor	Pilot	Pieces		
Sets				H105	
Ultra Cobalt Bi-Metal Holesaw Sets					
General Engineering #5 Holesaws: 16, 19, 22, 25, 29, 32, 35, 38, 44 & 51mm	QF1 5xQF4	BD26	10	H105 S5	9311963000312
General Engineering #14 Holesaws: 19, 22, 25, 32, 35, 38, 44, 51, 57, 63 & 76mm	QF1 3xQF4	BD26	11	H105 S14	9311963008790
Electrician Set #9 Holesaws: 16, 20, 25, 32, 40 & 51mm	QF1 3xQF4	BD26	6	H105 S9	9311963009896

Product Group: C0402



Product Information				Item #	Barcode
Description	Arbor	Pilot	Pieces		
Sets				H125	
Starter Set Holesaws: 20, 25, 32, 38 & 54mm	QFX 2 x QF4	BD26	7	H125 SS07A	9311963650623
Electrician Set Holesaws: 16, 20, 22, 25, 32, 40 & 51mm	QFX 4 x QF4	BD26	9	H125 SE09A	9311963650647
Electrician Set Holesaws: 16, 20, 22, 25, 32, 40, 51, 70 & 92mm	QFX 4 x QF4	BD26	11	H125 SE11A	9311963650661
Plumber Set Holesaws: 44, 57, 70, 92 & 111mm	QFX	BD26	7	H125 SP07A	9311963650630
Plumber Set Holesaws: 16, 19, 20, 22, 35, 44, 57, 70, 92 & 111mm	QFX 4 x QF4	BD26	12	H125 SP12A	9311963650692
Carpenter Set Holesaws: 16, 20, 22, 25, 32, 41, 54, 92 & 102mm	QFX 4 x QF4	BD26	12	H125 SC12A	9311963650685
General Purpose Set Holesaws: 16, 19, 22, 25, 29, 32, 35, 38, 44 & 51mm	QFX 5 x QF4	BD26	12	H125 SG12A	9311963650678
Maintenance Set Holesaws: 19, 22, 25, 32, 35, 38, 44, 51, 54, 63 & 76mm	QFX 3 x QF4	BD26	13	H125 SG13A	9311963650708
Mega Kit Holesaws: 19, 22, 25, 29, 32, 35, 38, 44, 51, 54, 57, 63, 67, 76, 83, 86, 92, 95, 105, 108, 114 & 121mm	QFX 4 x QF4	BD26, 2 x BD24	26	H125 SG26A	9311963650722
Lock Installation Kit Holesaws: 22, 25 & 54mm	BA1 & adaptor 1 x door lock guide		6	H125 SL06A	9311963650616

Holesaws TCT Multi-Purpose Sets

sutton

Application

DIY	Carpentry
Trade	General Contracting
Electrical	Woodworking
Plumbing	

Product Group: C0408

Product Information				Item #	Barcode
Description	Arbor	Pilot	Pieces		
Sets				H127	
TCT Multi-Purpose Holesaw Sets					
Downlight Set Holesaws: 41, 54, 64, 70, 89 & 92mm	H122 4311	H122 6106 H122 6106	6	H127 MP4	9311963627335
Carpenter Set Holesaws: 19, 22, 25, 32, 38, 54, 92 & 102mm	H122 4311	H122 6106 H122 6106	8	H127 MP6	9311963627342
Plumber Set Holesaws: 19, 20, 22, 35, 44, 51, 70, 92 & 111mm	H122 4311	H122 6106 H122 6206	9	H127 MP7	9311963627359
Electrician Set Holesaws: 20, 25, 32, 40, 60 & 92mm	H122 4311	H122 6106 H122 6206	6	H127 MP9	9311963627366

Holesaws Bi-Metal – Cobalt ULTRA

sutton

ULTRA

36mm Cutting Depth


Used for machine or hand drilling and are suited to cut steels, stainless steel, cast iron, non-ferrous materials, plastic and wood. Use Sutton Tools lubricating fluid to increase the life of your tool when cutting metal.



Fast Ejection Slots

Heavy Duty Back Plate
Ensures a smooth cut and precise holes for sockets, threads, cable and pipe lead-throughs

International Thread Standard
Accepts all arbors

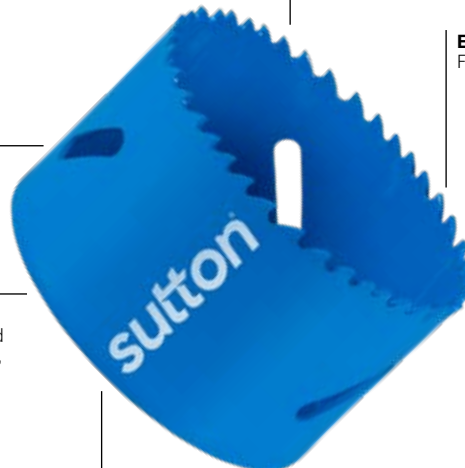

Bi-Metal Cobalt HSS
Premium quality teeth for toughness and longer life

Varied Pitched Teeth
Reduces vibration for cleaner finish and greater accuracy

Electron Beam Welded Teeth
For stronger longer lasting teeth

Application

DIY
Trade
Industrial Application
Automotive
Electrical
Plumbing
Carpentry
General Contracting
Woodworking
Metalworking
Machine Shop
MRO

Product Group: C0402

Product Information						Item #	Barcode
Diameter		Cutting Depth	UNF Thread	Arbor	Pilot	H105	
mm	inch	mm	inch				
14	9/16	36	1/2	BA1	BD24, BD26	H105 0140	9311963003184
16	5/8	36	1/2	BA1	BD24, BD26	H105 0160	9311963000640
17	11/16	36	1/2	BA1	BD24, BD26	H105 0170	9311963004501
19	3/4	36	1/2	BA1	BD24, BD26	H105 0190	9311963000619
20	-	36	1/2	BA1	BD24, BD26	H105 0200	9311963000909
21	13/16	36	1/2	BA1	BD24, BD26	H105 0210	9311963001821
22	7/8	36	1/2	BA1	BD24, BD26	H105 0220	9311963000763
24	15/16	36	1/2	BA1	BD24, BD26	H105 0240	9311963003818
25	1	36	1/2	BA1	BD24, BD26	H105 0250	9311963000114
27	1-1/16	36	1/2	BA1	BD24, BD26	H105 0270	9311963002118
29	1-1/8	36	1/2	BA1	BD24, BD26	H105 0290	9311963001760
30	1-3/16	36	1/2	BA1	BD24, BD26	H105 0300	9311963000992
32	1-1/4	36	5/8	BA2, QFX	BD24, BD26	H105 0320	9311963000329
33	1-5/16	36	5/8	BA2, QFX	BD24, BD26	H105 0330	9311963002378
35	1-3/8	36	5/8	BA2, QFX	BD24, BD26	H105 0350	9311963001104
37	1-7/16	36	5/8	BA2, QFX	BD24, BD26	H105 0370	9311963005492
38	1-1/2	36	5/8	BA2, QFX	BD24, BD26	H105 0380	9311963000541
40	1-9/16	36	5/8	BA2, QFX	BD24, BD26	H105 0400	9311963001289
41	1-5/8	36	5/8	BA2, QFX	BD24, BD26	H105 0410	9311963001944
43	1-11/16	36	5/8	BA2, QFX	BD24, BD26	H105 0430	9311963006802
44	1-3/4	36	5/8	BA2, QFX	BD24, BD26	H105 0440	9311963000688
46	1-13/16	36	5/8	BA2, QFX	BD24, BD26	H105 0460	9311963007243
48	1-7/8	36	5/8	BA2, QFX	BD24, BD26	H105 0480	9311963002125
51	2	36	5/8	BA2, QFX	BD24, BD26	H105 0510	9311963000169
52	2-1/16	36	5/8	BA2, QFX	BD24, BD26	H105 0520	9311963002491
54	2-1/8	36	5/8	BA2, QFX	BD24, BD26	H105 0540	9311963000626
57	2-1/4	36	5/8	BA3, QFX	BD24, BD26	H105 0570	9311963001050
59	2-5/16	36	5/8	BA3, QFX	BD24, BD26	H105 0590	9311963003696
60	2-3/8	36	5/8	BA3, QFX	BD24, BD26	H105 0600	9311963001302
63	2-1/2	36	5/8	BA3, QFX	BD24, BD26	H105 0630	9311963000572
65	2-9/16	36	5/8	BA3, QFX	BD24, BD26	H105 0650	9311963003542
67	2-5/8	36	5/8	BA3, QFX	BD24, BD26	H105 0670	9311963003931
70	2-3/4	36	5/8	BA3, QFX	BD24, BD26	H105 0700	9311963002347
73	2-7/8	36	5/8	BA3, QFX	BD24, BD26	H105 0730	9311963004082
76	3	36	5/8	BA3, QFX	BD24, BD26	H105 0760	9311963000633
79	3-1/8	36	5/8	BA3, QFX	BD24, BD26	H105 0790	9311963002880
83	3-1/4	36	5/8	BA3, QFX	BD24, BD26	H105 0830	9311963003702
86	3-3/8	36	5/8	BA3, QFX	BD24, BD26	H105 0860	9311963003146
89	3-1/2	36	5/8	BA3, QFX	BD24, BD26	H105 0890	9311963001012
92	3-5/8	36	5/8	BA3, QFX	BD24, BD26	H105 0920	9311963007014
95	3-3/4	36	5/8	BA3, QFX	BD24, BD26	H105 0950	9311963004426
98	3-7/8	36	5/8	BA3, QFX	BD24, BD26	H105 0980	9311963009889
102	4	36	5/8	BA3, QFX	BD24, BD26	H105 1020	9311963002033
105	4-1/8	36	5/8	BA3, QFX	BD24, BD26	H105 1050	9311963008783
108	4-1/4	36	5/8	BA3, QFX	BD24, BD26	H105 1080	9311963009506
111	4-3/8	36	5/8	BA3, QFX	BD24, BD26	H105 1110	9311963007519
114	4-1/2	36	5/8	BA3, QFX	BD24, BD26	H105 1140	9311963003559
121	4-3/4	36	5/8	BA3, QFX	BD24, BD26	H105 1210	9311963009513
127	5	36	5/8	BA3, QFX	BD24, BD26	H105 1270	9311963004860
140	5-1/2	36	5/8	BA3, QFX	BD24, BD26	H105 1400	9311963009520
152	6	36	5/8	BA3, QFX	BD24, BD26	H105 1520	9311963008134

Holesaws Bi-Metal – Cobalt

sutton

32mm Cutting Depth

Used for machine or hand drilling and are suited to cut steels, stainless steel, cast iron, non-ferrous materials, plastic and wood. Use Sutton Tools lubricating fluid to increase the life of your tool when cutting metal.



Fast Ejection Slots

International Thread Standard
Accepts all arbors



Made From Bi-Metal Cobalt HSS
For toughness and longer life

Varied Pitched Teeth
Reduces vibration for cleaner finish and greater accuracy

Application

DIY
Trade
Automotive
Electrical
Plumbing
Carpentry
General Contracting
Woodworking
Metalworking
Machine Shop
MRO

Product Group: C0402

Product Information						Item #	Barcode
Diameter		Cutting Depth	UNF Thread	Arbor	Pilot		
mm	inch	mm	inch			H125	
14	9/16	32	1/2	UA1	BD24, BD26	H125 0140	9311963624884
16	5/8	32	1/2	UA1	BD24, BD26	H125 0160	9311963624891
17	11/16	32	1/2	UA1	BD24, BD26	H125 0170	9311963624907
19	3/4	32	1/2	UA1	BD24, BD26	H125 0190	9311963624914
20	-	32	1/2	UA1	BD24, BD26	H125 0200	9311963624921
21	13/16	32	1/2	UA1	BD24, BD26	H125 0210	9311963624938
22	7/8	32	1/2	UA1	BD24, BD26	H125 0220	9311963624945
24	15/16	32	1/2	UA1	BD24, BD26	H125 0240	9311963624952
25	1	32	1/2	UA1	BD24, BD26	H125 0250	9311963624969
27	1-1/16	32	1/2	UA1	BD24, BD26	H125 0270	9311963624976
29	1-1/8	32	1/2	UA1	BD24, BD26	H125 0290	9311963624983
30	1-3/16	32	1/2	UA1	BD24, BD26	H125 0300	9311963624990
32	1-1/4	32	5/8	UA2, QFX	BD24, BD26	H125 0320	9311963625003
33	1-5/16	32	5/8	UA2, QFX	BD24, BD26	H125 0330	9311963625010
35	1-3/8	32	5/8	UA2, QFX	BD24, BD26	H125 0350	9311963625027
37	1-7/16	32	5/8	UA2, QFX	BD24, BD26	H125 0370	9311963625034
38	1-1/2	32	5/8	UA2, QFX	BD24, BD26	H125 0380	9311963625041
40	1-9/16	32	5/8	UA2, QFX	BD24, BD26	H125 0400	9311963625058
41	1-5/8	32	5/8	UA2, QFX	BD24, BD26	H125 0410	9311963625065
43	1-11/16	32	5/8	UA2, QFX	BD24, BD26	H125 0430	9311963625072
44	1-3/4	32	5/8	UA2, QFX	BD24, BD26	H125 0440	9311963625089
46	1-13/16	32	5/8	UA2, QFX	BD24, BD26	H125 0460	9311963625096
48	1-7/8	32	5/8	UA2, QFX	BD24, BD26	H125 0480	9311963625102
51	2	32	5/8	UA2, QFX	BD24, BD26	H125 0510	9311963625119
52	2-1/16	32	5/8	UA2, QFX	BD24, BD26	H125 0520	9311963625126
54	2-1/8	32	5/8	UA2, QFX	BD24, BD26	H125 0540	9311963625133
56	2-3/16	32	5/8	UA3, QFX	BD24, BD26	H125 0560	9311963625140
57	2-1/4	32	5/8	UA3, QFX	BD24, BD26	H125 0570	9311963625157
59	2-5/16	32	5/8	UA3, QFX	BD24, BD26	H125 0590	9311963625164
60	2-3/8	32	5/8	UA3, QFX	BD24, BD26	H125 0600	9311963625171
63	2-1/2	32	5/8	UA3, QFX	BD24, BD26	H125 0630	9311963625188
65	2-9/16	32	5/8	UA3, QFX	BD24, BD26	H125 0650	9311963625195
67	2-5/8	32	5/8	UA3, QFX	BD24, BD26	H125 0670	9311963625201
70	2-3/4	32	5/8	UA3, QFX	BD24, BD26	H125 0700	9311963625218
73	2-7/8	32	5/8	UA3, QFX	BD24, BD26	H125 0730	9311963625225
76	3	32	5/8	UA3, QFX	BD24, BD26	H125 0760	9311963625232
79	3-1/8	32	5/8	UA3, QFX	BD24, BD26	H125 0790	9311963625249
83	3-1/4	32	5/8	UA3, QFX	BD24, BD26	H125 0830	9311963625256
86	3-3/8	32	5/8	UA3, QFX	BD24, BD26	H125 0860	9311963625263
89	3-1/2	32	5/8	UA3, QFX	BD24, BD26	H125 0890	9311963625270
92	3-5/8	32	5/8	UA3, QFX	BD24, BD26	H125 0920	9311963625287
95	3-3/4	32	5/8	UA3, QFX	BD24, BD26	H125 0950	9311963625294
98	3-7/8	32	5/8	UA3, QFX	BD24, BD26	H125 0980	9311963625300
102	4	32	5/8	UA3, QFX	BD24, BD26	H125 1020	9311963625317
105	4-1/8	32	5/8	UA3, QFX	BD24, BD26	H125 1050	9311963625324
108	4-1/4	32	5/8	UA3, QFX	BD24, BD26	H125 1080	9311963625331
111	4-3/8	32	5/8	UA3, QFX	BD24, BD26	H125 1110	9311963625348
114	4-1/2	32	5/8	UA3, QFX	BD24, BD26	H125 1140	9311963625355
121	4-3/4	32	5/8	UA3, QFX	BD24, BD26	H125 1210	9311963625362
127	5	32	5/8	UA3, QFX	BD24, BD26	H125 1270	9311963625379
140	5-1/2	32	5/8	UA3, QFX	BD24, BD26	H125 1400	9311963625386
152	6	32	5/8	UA3, QFX	BD24, BD26	H125 1520	9311963625393

Holesaws Carbide Tipped

sutton

60mm Cutting Depth

Cuts through the toughest materials, suited for wood and nails, mild steel, stainless, cast iron pipes, MDF, plasterboard, laminate, brick and plastic.



Easy To Use Release Slots
For swift and easy core ejection

International Thread Standard
Accepts all arbors



Tungsten Carbide Tipped
Cuts 10 times faster than conventional Bi-Metal holesaws in timber



Application

DIY
Trade
Electrical
Plumbing
Carpentry
General Contracting
Woodworking

Product Group C0304

Product Information						Item #	Barcode
Diameter		Cutting Depth	UNF Thread	Arbor	Pilot		
mm	inch	mm	inch			H128	
22	7/8	60	1/2	UA1	BD26	H128 0220	9311963631691
25	1	60	1/2	UA1	BD26	H128 0250	9311963631707
32	1-1/4	60	5/8	UA2, QFX	BD26	H128 0320	9311963628615
35	1-3/8	60	5/8	UA2, QFX	BD26	H128 0350	9311963628622
38	1-1/2	60	5/8	UA2, QFX	BD26	H128 0380	9311963628639
41	1-5/8	60	5/8	UA2, QFX	BD26	H128 0410	9311963628646
44	1-3/4	60	5/8	UA2, QFX	BD26	H128 0440	9311963628653
51	2	60	5/8	UA2, QFX	BD26	H128 0510	9311963628660
54	2-1/8	60	5/8	UA2, QFX	BD26	H128 0540	9311963628677
57	2-1/4	60	5/8	UA3, QFX	BD26	H128 0570	9311963628684
60	2-3/8	60	5/8	UA3, QFX	BD26	H128 0600	9311963628691
65	2-9/16	60	5/8	UA3, QFX	BD26	H128 0650	9311963628707
67	2-5/8	60	5/8	UA3, QFX	BD26	H128 0670	9311963628714
70	2-3/4	60	5/8	UA3, QFX	BD26	H128 0700	9311963628721
76	3	60	5/8	UA3, QFX	BD26	H128 0760	9311963628738
89	3-1/2	60	5/8	UA3, QFX	BD26	H128 0890	9311963628745
92	3-5/8	60	5/8	UA3, QFX	BD26	H128 0920	9311963631714
102	4	60	5/8	UA3, QFX	BD26	H128 1020	9311963628752

Holesaws TCT – Multi-Purpose

sutton

54mm Cutting Depth

Suited to cut timber, hardwood, softwood, MDF, plasterboard, compressed fibre cement sheet, cement sheet, plastics, ceramic tiles and abrasive materials.



Deep Cut-Outs
For swift and easy core ejection



International Thread Standard
Accepts all arbors

Tungsten Carbide Tipped
Cuts 5 times faster than conventional Bi-Metal holesaws in timber

Application

DIY
Trade
Electrical
Plumbing
Carpentry
General Contracting
Woodworking

Product Group C0408

Product Information						Item #	Barcode
Diameter		Cutting Depth	UNF Thread	Arbor	Pilot		
mm	inch	mm	inch			H127	
16	5/8	54	1/2	UA1	BD26	H127 0160	9311963626727
19	3/4	54	1/2	UA1	BD26	H127 0190	9311963626734
20	-	54	1/2	UA1	BD26	H127 0200	9311963626741
22	7/8	54	1/2	UA1	BD26	H127 0220	9311963626758
25	1	54	1/2	UA1	BD26	H127 0250	9311963626765
29	1-1/8	54	1/2	UA1	BD26	H127 0290	9311963626772
30	1-3/16	54	1/2	UA1	BD26	H127 0300	9311963626789
32	1-1/4	54	5/8	UA2, QFX	BD26	H127 0320	9311963626796
35	1-3/8	54	5/8	UA2, QFX	BD26	H127 0350	9311963626802
38	1-1/2	54	5/8	UA2, QFX	BD26	H127 0380	9311963626819
40	1-9/16	54	5/8	UA2, QFX	BD26	H127 0400	9311963626826
41	1-5/8	54	5/8	UA2, QFX	BD26	H127 0410	9311963626833
44	1-3/4	54	5/8	UA2, QFX	BD26	H127 0440	9311963626840
51	2	54	5/8	UA2, QFX	BD26	H127 0510	9311963626857
54	2-1/8	54	5/8	UA2, QFX	BD26	H127 0540	9311963626864
57	2-1/4	54	5/8	UA3, QFX	BD26	H127 0570	9311963626871
60	2-3/8	54	5/8	UA3, QFX	BD26	H127 0600	9311963626888
64	2-1/2	54	5/8	UA3, QFX	BD26	H127 0640	9311963626895
70	2-3/4	54	5/8	UA3, QFX	BD26	H127 0700	9311963626901
76	3	54	5/8	UA3, QFX	BD26	H127 0760	9311963626918
86	3-3/8	54	5/8	UA3, QFX	BD26	H127 0860	9311963626925
89	3-1/2	54	5/8	UA3, QFX	BD26	H127 0890	9311963626932
92	3-5/8	54	5/8	UA3, QFX	BD26	H127 0920	9311963626949
102	4	54	5/8	UA3, QFX	BD26	H127 1020	9311963626956
111	4-3/8	54	5/8	UA3, QFX	BD26	H127 1110	9311963626963
121	4-3/4	54	5/8	UA3, QFX	BD26	H127 1210	9311963626970
127	5	54	5/8	UA3, QFX	BD26	H127 1270	9311963626987
152	6	54	5/8	UA3, QFX	BD26	H127 1520	9311963626994
Accessories (Product Group Z1007)							
Door Lock Installation Jig						359920002*	9311963619064



Easy Core Ejection



2-Up Cutting To Enlarge Existing Holes



Cut Extreme Angles



359920002

Door Lock Installation Jig



Holesaws Impact Bi-Metal

sutton

8mm Cutting Depth


Sutton Tools Impact Bi-Metal Holesaw are designed for use in impact drivers. Suited to cut sheet metal up to 3mm maximum thickness. Ideal for electrical installation, junction boxes, ducting and general sheet fabrication.



Stop Shoulder
Prevents over drilling

1/4" Hex Shank
Suitable for impact drivers

Ejector Spring
For automatic
core ejection

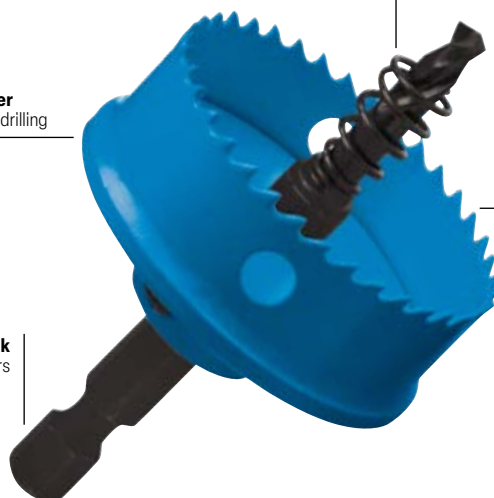

Thin Wall 8 TPI
For fast and burr
free cutting

Application

DIY
Trade
Automotive
Electrical
Plumbing
Metalworking
MRO



Check out the demo

Product Group: C0402

Product Information				Item #	Barcode
Diameter	Cutting Depth	Shank	Pieces	H119	
mm	inch	mm	inch		
12	15/32	8	1/4	H119 0120	9311963607450
13	33/64	8	1/4	H119 0130	9311963607467
16	5/8	8	1/4	H119 0160	9311963607474
19	3/4	8	1/4	H119 0190	9311963607481
20	-	8	1/4	H119 0200	9311963607498
22	7/8	8	1/4	H119 0220	9311963607504
25	1	8	1/4	H119 0250	9311963607511
29	1 - 1/8	8	1/4	H119 0290	9311963607528
30	1 - 3/16	8	1/4	H119 0300	9311963607535
32	1 - 1/4	8	1/4	H119 0320	9311963607542
35	1 - 3/8	8	1/4	H119 0350	9311963607559
38	1 - 1/2	8	1/4	H119 0380	9311963607566
40	1 - 9/16	8	1/4	H119 0400	9311963607573
44	1 - 3/4	8	1/4	H119 0440	9311963607580
51	2	8	1/4	H119 0510	9311963607597
54	2 - 1/8	8	1/4	H119 0540	9311963607603
60	2 - 3/8	8	1/4	H119 0600	9311963607610
Sets					
22, 29, 35mm	8	1/4	3	H119 S3	9311963607627
19, 22, 25, 29, 32, 35, 38mm	8	1/4	7	H119 S7	9311963607634
Replacement Pilot Drill & Spring					
54mm Hex		1/4		H119 PD1	9311963621616



H119 S3



H119 S7



H119 PD1

Holesaws HSS

sutton

2mm Cutting Depth

Produce accurate, round clean holes in steel and alloy sheets.



Safety Stopper
Prevents breakthrough, thus protecting the work surface

Replaceable Pilot Drill
Secured tightly with grub screw

Purpose Designed Teeth
For optimum performance in sheet metal

Hex Shank
For positive grip preventing slippage in chuck



Application

DIY
Trade
Automotive
Electrical
Plumbing
Metalworking
MRO

Product Group: C0302

Product Information					Item #	Barcode
Diameter		Cutting Depth	Arbor			
mm	inch	mm			H101	
16	5/8	2	HC1		H101 0160	9311963063485
20	-	2	HC1		H101 0200	9311963063492
23	-	2	HC1		H101 0230	9311963063508
25	1	2	HC1		H101 0250	9311963063515
32	1-1/4	2	HC2		H101 0320	9311963063539
40	1-9/16	2	HC2		H101 0400	9311963063546
50	-	2	HC2		H101 0500	9311963063560
Arbors	Holesaw Size	Shank	Chuck Size	Thread	H100	
HC1	16-25mm	11/32	10mm	1/2 UNF	H100 HC1	9311963004471
HC2	32-50mm	11/32	10mm	5/8 UNF	H100 HC2	9311963004570
Pilot Drill						
6.35mm (1/4")		Suits both Arbors. 54mm overall length			H100 0063	9311963028590

Holesaws TCT

sutton

25mm / 5mm Cutting Depth

Heavy Duty Tungsten Carbide Tooth (TCT) Holesaws are suitable for cutting steel, stainless steel, ferrous metals, aluminium, plastics and fibreglass. These holesaws will last up to 10x longer than standard Bi-Metal Holesaws. Can be used in both hand and stationary drilling machines.



Safety Stopper
Prevents breakthrough, thus protecting the work surface

3-Flat Shank
For positive grip, preventing slippage in chuck



Precision Ground Tungsten Carbide Teeth
Produces clean, high quality cuts

Ejector Spring
For automatic core ejection



Check out the demo

Application

DIY
Trade
Automotive
Electrical
Plumbing
Metalworking
MRO

Product Group: C0304

Product Information				Item #	Barcode
Diameter	Cutting Depth	Pilot Drill	Pieces	H117	
mm	inch	mm			
16	5/8	25	PDT2	H117 0160	9311963603902
19	3/4	25	PDT2	H117 0190	9311963603919
20	-	25	PDT2	H117 0200	9311963603926
22	7/8	25	PDT2	H117 0220	9311963603933
25	1	25	PDT2	H117 0250	9311963603940
32	1-1/4	25	PDT2	H117 0320	9311963603971
38	1-1/2	25	PDT2	H117 0380	9311963603995
40	1-9/16	25	PDT2	H117 0400	9311963604008
50	1-15/16	25	PDT2	H117 0500	9311963604022
Set: 16, 20, 25, 32, 40mm				H117 0005	9311963613352
Pilot Drill (PDT2) 6.0 x 76mm				H117 PDT2	9311963613345



H117 0005

Recommended Cutting Speed RPM							
Ømm	Steel	Alloy Steel	Stainless Steel	Aluminium	Copper	Plastic	Fibreglass
≤20	700-1000	700-900	700-800	1500-1800	800-1000	1500-1800	1500-1800
21-30	700-800	600-700	400-600	1500-1800	800-1000	1500-1800	1500-1800
31-40	500-600	450-500	350-450	1500-1800	800-1000	1500-1800	1500-1800
41-50	400-500	300-400	250-400	800-1000	600-800	1000-1500	1000-1500

Note: Observe the recommended speed. Keep the Tungsten Carbide Teeth sharp.

Holesaws TCT – Pro (Short)

sutton

2-4mm Cutting Depth

Heavy Duty Tungsten Carbide Tooth (TCT) Holesaws are suitable for cutting steel, stainless steel, ferrous metals, aluminium, wood, chipboard, plastics and fibreglass. These holesaws will last up to 10x longer than standard Bi-Metal Holesaws.

Can be used in both hand and stationary drilling machines.



Arbor
Anti-shear
arbor system



Ejector Spring
For automatic core ejection

Self-Centring Pilot Drill
Replaceable pilot drill secured
tightly with grub screw

Tungsten Carbide Teeth
Precision ground for cutting
difficult and abrasive
materials. Producing
smooth, high cutting
capacity, performance and
tool life

Application

DIY
Trade
Automotive
Electrical
Plumbing
Metalworking
MRO

Product Group: C0304

Product Information					Item #	Barcode
Diameter	Cutting Depth	Shank	Pieces			
mm	inch	mm	mm		H108	
16	5/8	4	10	1	H108 0160	9311963035475
19	3/4	4	10	1	H108 0190	9311963039961
20	-	4	10	1	H108 0200	9311963039978
21	13/16	4	10	1	H108 0210	9311963049816
22	7/8	4	10	1	H108 0220	9311963021522
25	1	4	10	1	H108 0250	9311963039985
28	-	4	10	1	H108 0280	9311963016221
30	1-3/16	4	10	1	H108 0300	9311963039992
32	1-1/4	4	10	1	H108 0320	9311963035482
35	1-3/8	4	10	1	H108 0350	9311963035499
38	1-1/2	4	10	1	H108 0380	9311963040004
40	1-9/16	4	10	1	H108 0400	9311963015330
44	1-3/4	4	10	1	H108 0440	9311963029238
50	-	4	10	1	H108 0500	9311963026817
55	-	4	13	1	H108 0550	9311963049830
60	2-3/8	4	13	1	H108 0600	9311963029245
65	2-9/16	4	13	1	H108 0650	9311963031965
70	2-3/4	4	13	1	H108 0700	9311963049847
75	-	4	13	1	H108 0750	9311963021539
Set						
16, 20, 25, 32, 40mm				5	H108 0005	9311963543987
Pilot Drill						
HSS 6.0 x 50mm Suits TCT Holesaws				1	H108 0060	9311963171265



H108 0005

Holesaws TCT – Pro (Long)

sutton


6-20mm Cutting Depth

Heavy Duty Tungsten Carbide Tooth (TCT) Holesaws are suitable for cutting steel, stainless steel, ferrous metals, aluminium, wood, chipboard, plastics and fibreglass. These holesaws will last up to 10x longer than standard Bi-Metal Holesaws.

Can be used in both hand and stationary drilling machines.



Arbor
Anti-shear
arbor system

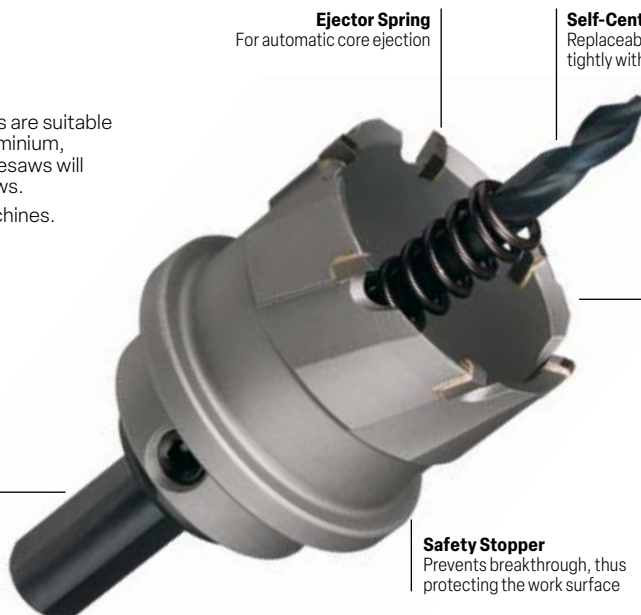

Ejector Spring
For automatic core ejection

Self-Centring Pilot Drill
Replaceable pilot drill secured
tightly with grub screw

Tungsten Carbide Teeth
Precision ground for cutting
difficult and abrasive materials.
Producing smooth, high cutting
capacity, performance and
tool life

Safety Stopper
Prevents breakthrough, thus
protecting the work surface

Application

DIY
Trade
Automotive
Electrical
Plumbing
Metalworking
MRO

Product Group: C0304

Product Information					Item #	Barcode
Diameter		Cutting Depth	Pilot	Shank		
mm	inch	mm		mm	H113	
19	3/4	20	0060	13	H113 0190	9311963544212
20	-	20	0060	13	H113 0200	9311963544229
21	13/16	20	0060	13	H113 0210	9311963544236
22	7/8	20	0060	13	H113 0220	9311963544243
25	1	20	0060	13	H113 0250	9311963544250
28	-	20	0060	13	H113 0280	9311963544267
30	1-3/16	20	0060	13	H113 0300	9311963544274
32	1-1/4	20	0060	13	H113 0320	9311963544281
35	1-3/8	20	0060	13	H113 0350	9311963544298
38	1-1/2	20	0060	13	H113 0380	9311963544304
40	1-9/16	20	0060	13	H113 0400	9311963544311
44	1-3/4	20	0060	13	H113 0440	9311963544328
50	1-15/16	20	0060	13	H113 0500	9311963544335
55	-	20	0060	13	H113 0550	9311963544342
60	2-3/8	20	0060	13	H113 0600	9311963544359
65	2-9/16	20	0080	13	H113 0650	9311963544366
70	2-3/4	20	0080	13	H113 0700	9311963544373
75	-	20	0080	13	H113 0750	9311963544380
Pilot Drill						
HSS 6.0 x 80mm Suits TCT Pro Holesaws 19-60mm					H113 0060	9311963544397
HSS 8.0 x 100mm Suits TCT Pro Holesaws 65-75mm					H113 0080	9311963556215

Holesaws Annular Cutters

sutton



Industrial quality cutting solution for use with magnetic base drilling machines. Suitable for cutting steel, stainless steel and other ferrous metals along with aluminium and other non-ferrous metals.

Made From HSS
For heat and wear resistance



TiAlN Coated
For increased surface hardness and longer tool life

Universal Shank
Fits all magnetic base drilling machines

Product Group: C0302

Product Information		Item #	Barcode
Diameter	Cutting Depth		
mm	mm	H180	
25mm Cutting Depth			
12	25	H180 0120	9311963633602
13	25	H180 0130	9311963633619
14	25	H180 0140	9311963633626
15	25	H180 0150	93119636339055
16	25	H180 0160	9311963633633
17	25	H180 0170	9311963633640
18	25	H180 0180	9311963633657
19	25	H180 0190	93119636339062
20	25	H180 0200	9311963633664
21	25	H180 0210	93119636339079
22	25	H180 0220	9311963633671
23	25	H180 0230	93119636339086
24	25	H180 0240	9311963633688
25	25	H180 0250	9311963633695
26	25	H180 0260	9311963633701
27	25	H180 0270	93119636339093
28	25	H180 0280	9311963633718
29	25	H180 0290	93119636339109
30	25	H180 0300	9311963633725
31	25	H180 0310	93119636339116
32	25	H180 0320	9311963633732
33	25	H180 0330	93119636334852
34	25	H180 0340	93119636334869
35	25	H180 0350	93119636334876
36	25	H180 0360	93119636334883
37	25	H180 0370	93119636334890
38	25	H180 0380	93119636334906
39	25	H180 0390	93119636334913
40	25	H180 0400	93119636334920
41	25	H180 0410	93119636339123
42	25	H180 0420	93119636334937
43	25	H180 0430	93119636339130
44	25	H180 0440	93119636339147
45	25	H180 0450	93119636334944
46	25	H180 0460	93119636334951
47	25	H180 0470	93119636339154
48	25	H180 0480	93119636334968
49	25	H180 0490	93119636339161
50	25	H180 0500	93119636334975
51	25	H180 0510	93119636334982
52	25	H180 0520	93119636334999
53	25	H180 0530	93119636335002
54	25	H180 0540	93119636335019
55	25	H180 0550	93119636335026
56	25	H180 0560	93119636335033
57	25	H180 0570	93119636335040
58	25	H180 0580	93119636335057
59	25	H180 0590	93119636335064
60	25	H180 0600	93119636335071
61	25	H180 0610	93119636335088
62	25	H180 0620	93119636335095
63	25	H180 0630	93119636335101
64	25	H180 0640	93119636335118
65	25	H180 0650	93119636335125
Pilot Pin			
6.34 x 77 mm		H180 0063	9311963633749

Product Information		Item #	Barcode
Diameter	Cutting Depth		
mm	mm	H181	
50mm Cutting Depth			
12	50	H181 0120	9311963633756
13	50	H181 0130	9311963633763
14	50	H181 0140	9311963633770
15	50	H181 0150	93119636339178
16	50	H181 0160	9311963633787
17	50	H181 0170	9311963633794
18	50	H181 0180	9311963633800
19	50	H181 0190	93119636339185
20	50	H181 0200	9311963633817
21	50	H181 0210	93119636339192
22	50	H181 0220	9311963633824
23	50	H181 0230	93119636339208
24	50	H181 0240	9311963633831
25	50	H181 0250	9311963633848
26	50	H181 0260	9311963633855
27	50	H181 0270	93119636339215
28	50	H181 0280	9311963633862
29	50	H181 0290	93119636339222
30	50	H181 0300	9311963633879
31	50	H181 0310	93119636339239
32	50	H181 0320	9311963633886
33	50	H181 0330	9311963633893
34	50	H181 0340	9311963633909
35	50	H181 0350	9311963633916
36	50	H181 0360	9311963633923
37	50	H181 0370	9311963633930
38	50	H181 0380	9311963633947
39	50	H181 0390	9311963633954
40	50	H181 0400	9311963633961
41	50	H181 0410	9311963635132
42	50	H181 0420	9311963635149
43	50	H181 0430	9311963635156
44	50	H181 0440	9311963635163
45	50	H181 0450	9311963635170
46	50	H181 0460	9311963635187
47	50	H181 0470	9311963635194
48	50	H181 0480	9311963635200
49	50	H181 0490	9311963635217
50	50	H181 0500	9311963635224
51	50	H181 0510	9311963635231
52	50	H181 0520	9311963635248
53	50	H181 0530	9311963635255
54	50	H181 0540	9311963635262
55	50	H181 0550	9311963635279
56	50	H181 0560	9311963635286
57	50	H181 0570	9311963635293
58	50	H181 0580	9311963635309
59	50	H181 0590	9311963635316
60	50	H181 0600	9311963635323
61	50	H181 0610	9311963635330
62	50	H181 0620	9311963635347
63	50	H181 0630	9311963635354
64	50	H181 0640	9311963635361
65	50	H181 0650	9311963635378
Pilot Pin			
6.34 x 103mm		H181 0063	9311963633978

Holesaws Annular Cutters

sutton



Industrial quality cutting solution for use with magnetic base drilling machines. Suitable for cutting steel, stainless steel and other ferrous metals along with aluminium and other non-ferrous metals.

Made From HSS
For heat and wear resistance

TiAlN Coated
For increased surface hardness and longer tool life

Universal Shank
Fits all magnetic base drilling machines



Product Group: C0302

Product Information		Item #	Barcode
Diameter	Cutting Depth		
mm	mm		
75mm Cutting Depth		H182	
18	75	H182 0180	9311963639246
19	75	H182 0190	9311963639253
20	75	H182 0200	9311963639260
21	75	H182 0210	9311963639277
22	75	H182 0220	9311963639284
23	75	H182 0230	9311963639291
24	75	H182 0240	9311963639307
25	75	H182 0250	9311963639314
26	75	H182 0260	9311963639321
27	75	H182 0270	9311963639338
28	75	H182 0280	9311963639345
29	75	H182 0290	9311963639352
30	75	H182 0300	9311963639369
31	75	H182 0310	9311963639376
32	75	H182 0320	9311963639383
Pilot Pin			
7.98 x 130mm		H182 0063	9311963639390

Made from M2 High Speed Steel (HSS)

- Offers the best combination of strength, heat and wear resistance.

Titanium Aluminium Nitride (TiAlN) Coated:

- Increases surface hardness further improving performance.
- Reduces heat and friction during the cutting process.

19.05mm (3/4") Universal Multi-Fit Shank:

- Made to fit both standard and quick-change magnetic base drilling machines.



Clean Holes




Holesaws Diamond Grit

sutton

25mm Cutting Depth

Designed for cutting ceramic and porcelain tiles, marble and soft stone, fibre cement and fibreglass, hard plastics and plexiglass.

A constant flood of water will prolong cutting life.
Overheating will destroy diamond bond.

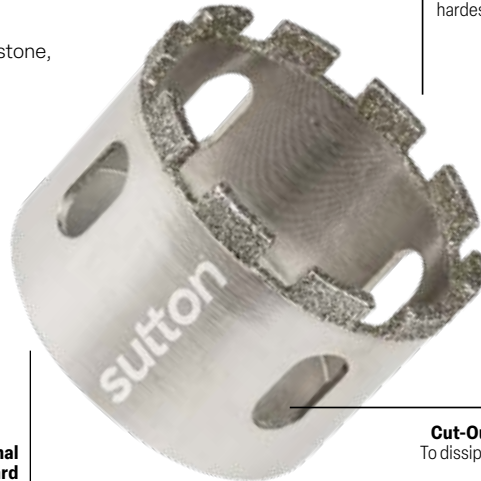

Diamond Coating
For long life in the
hardest tiles

**International
Thread Standard**
Accepts all arbors

Cut-Out Slots
To dissipate heat

Application

DIY
Trade
Plumbing
Tiling
Masonry
Pools & Spa's
Boat Building

Product Group: C0404

Product Information						Item #	Barcode
Diameter	Cutting Depth	Thread	Arbor	Pilot			
mm	inch	mm					
19	3/4	25	1/2 UNF	DA01	PD01	H115 0190	9311963556635
22	7/8	25	1/2 UNF	DA01	PD01	H115 0220	9311963556642
25	1	25	1/2 UNF	DA01	PD01	H115 0250	9311963556659
29	1-1/8	25	1/2 UNF	DA01	PD01	H115 0290	9311963556666
32	1-1/4	25	5/8 UNF	DA02	PD02	H115 0320	9311963556673
35	1-3/8	25	5/8 UNF	DA02	PD02	H115 0350	9311963556680
38	1-1/2	25	5/8 UNF	DA02	PD02	H115 0380	9311963556697
44	1-3/4	25	5/8 UNF	DA02	PD02	H115 0440	9311963556703
51	2	25	5/8 UNF	DA02	PD02	H115 0510	9311963556710
54	2-1/8	25	5/8 UNF	DA02	PD02	H115 0540	9311963556727
64	2-1/2	25	5/8 UNF	DA02	PD02	H115 0640	9311963556734
76	3	25	5/8 UNF	DA02	PD02	H115 0760	9311963556741
92	3-5/8	25	5/8 UNF	DA02	PD02	H115 0920	9311963556758
102	4	25	5/8 UNF	DA02	PD02	H115 1020	9311963556765
105	4-1/8	25	5/8 UNF	DA02	PD02	H115 1050	9311963556772
						H115	
Sets	Contents			Pieces			
Holesaws: Arbors:	19, 25, 32, 38 & 51mm DA01 & DA02			5		H115 0007	9311963556840
Holesaws: Arbors: Holesaw Guide:	19, 22, 25, 29, 35, 38, 44 & 51mm DA01 & DA02 DG70			8		H115 0011	9311963556833
Drill Guides	Holesaw Size						
DG35	19-35mm					H115 DG35	9311963556826
DG70	19-70mm					H115 DG70	9311963556819
Arbors	Holesaw Size	Chuck Size	Thread	Shank			
DA01	19-30mm	10mm	1/2 UNF	11/32		H115 DA01	9311963556789
DA02	32-152mm	13mm	5/8 UNF	7/16		H115 DA02	9311963556796
TCT Pilot Drill - Glass, Tile & Laminate							
PD01	8 x 63mm			DA01		H115 PD01	9311963556802
PD02	8 x 69mm			DA02		H115 PD02	9311963556830
TCT Pilot Drill - Compressed Fibre Cement (Product Group: C0408)						H104	
TCT	6.35mm (1/4) x 105mm					H104 CT63	9311963420851

Holesaws Diamond Core Bit M14

sutton

35mm Cutting Depth

Designed for cutting ceramic and porcelain tiles, marble and granite, bricks, fibre cement and fibreglass. Featuring a M14 thread, they are designed for use with angle grinders and deliver fast cutting performance. The diamond segmented tooth design and cut-out slots help to reduce the temperature while cutting, and therefore extends the life of the blade which allows it to make more holes before replacement.

Recommended maximum cutting speed: 11,000RPM.



M14 Thread
Fits angle grinders with M14 thread



Diamond Segmented
For long life in the hardest tiles

Cut-Out Slots
To dissipate heat

Application


DIY
Trade
Plumbing
Tiling
Masonry
Pools & Spa's
Boat Building

Product Group: C0404


Product Information				Item #	Barcode
				H116	
Diameter	Cutting Depth	Thread			
mm	inch	mm			
5	13/64	35	M14	H116 0050	9311963598512
6	15/64	35	M14	H116 0060	9311963598529
8	5/16	35	M14	H116 0080	9311963598536
10	25/64	35	M14	H116 0100	9311963598543
12	15/32	35	M14	H116 0120	9311963598550
19	3/4	35	M14	H116 0190	9311963598574
25	1	35	M14	H116 0250	9311963598598
32	1-1/4	35	M14	H116 0320	9311963598611
38	1-1/2	35	M14	H116 0380	9311963598635
51	2	35	M14	H116 0510	9311963598659

Instructions For Use

Fitting to the angle grinder:




1 Disconnect tool from power source. Consult the manufacturer's operating manual to remove wheel guard




2 Screw the diamond core bit onto the spindle until it bottoms against the shoulder. Ensure core bit is secure before operating


Cutting Instructions:



A Using light pressure, start cutting at 45° angle then gradually straighten the power tool



B Increase pressure when in upright position



C Swing the power tool clockwise while cutting allows for dust evacuation

Helpful Hints

- Do not use with hammer setting as this will damage the bit and tile
- Apply consistent pressure, allowing the tool to do the work
- Cutting speed with water <3000RPM
- Dressing the bit will increase performance

Holesaws DIY Sets



166044666



166044665



166044659



166044660



166044667



166044672



166044661

Holesaws Bi-Metal HSS & TCT Sets



166044662



166044663



166044664

Holesaws DIY Sets



Suited to cut wood, plastic and composite materials up to 25mm thick.



Precision Sharpened Teeth
To produce clean cuts

Thread Pattern
18TPI – fits only
P&N® mandrels

Application

DIY
Electrical
Plumbing
Carpentry
Woodworking

Product Group: C0402

Product Information		Item #	Barcode
Description	Pieces		
Sets			
Holesaw & Mandrel Set 32, 38, 44 & 54mm Holesaws & Mandrel	5	166044666	9311744446667
Holesaw Set 19, 22, 29, 32, 36, 44, 51 & 64mm Holesaws, plus 2 Mandrels & Allen Key	8	166044665	9311744446650
Holesaw Set - CNH05 32, 38, 51 & 54mm Holesaws, plus 6mm Arbor & Pilot Drill	5	166044659	9311744446599
Holesaw Set - CNH06 32, 38, 44, 51, 57 & 63mm Holesaws, plus 6mm Arbor & Pilot Drill	6	166044660	9311744446605
Downlight Holesaw Set 90mm Holesaw & Mandrel	2	166044667	9311744446674
Lock Installation Set 54mm Holesaw, 3 & 22mm Spade Bits, plus 6mm Arbor & Pilot Drill	4	166044672	9311744446728
Lock Installation Kit - CNLK10 54mm Holesaw, 25mm Spade Bit, plus 6mm Arbor & Pilot Drill	3	166044661	9311744446612

Holesaws Bi-Metal HSS & TCT Sets



Product Group: C0402

Product Information		Item #	Barcode
Description	Pieces		
Sets			
Bi-Metal High Speed Steel			
Electrician Set Holesaws: 16, 20, 22, 25, 32, 40 & 51mm	7	166044662	9311744446629
Plumber Set Holesaws: 19, 22, 35, 44, 57 & 63mm	6	166044663	9311744446636
Tungsten Carbide Teeth			
Starter Set Holesaws: 22, 29, 35, 44, 51 & 64mm	6	166044664	9311744446643

Holesaws Carbide Grit



Perfect for creating downlight holes and recessed light installations.
Allows for smooth cutting in ceiling tiles and plaster surfaces.
Recommended cutting speed: 300RPM.



Fits Arbors With
5/8" UNF Thread
(18 TPI)



Carbide Tipped

Lightweight Design
For easy handling

Application

- DIY
- Trade
- Electrical

Product Group: C0408

Product Information		Item #	Barcode
Diameter			
mm			
70		166044673	9311744446834
90		166044674	9311744446841



Holesaws Multi-Function Adjustable Ceiling Hole Cutter


sutton

The quick and cleaner way to cut or enlarge holes in ceilings, walls or floor made with plasterboard, fibre cement board, fibreglass or stucco.



Carbide tip better in fibre cement board and fibreglass



Clear dust shield for great visibility and minimal mess

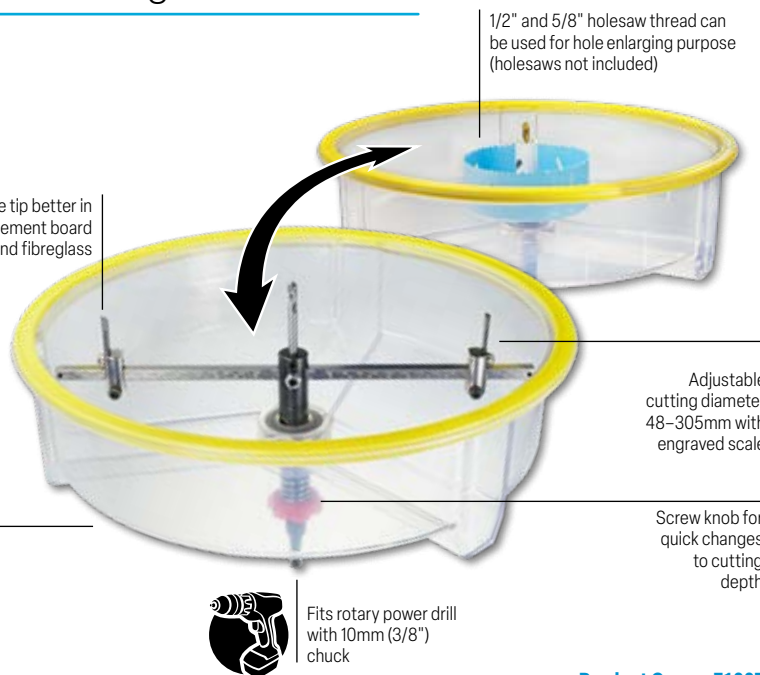

Fits rotary power drill with 10mm (3/8") chuck

Product Group: Z1007

Product Information		Item #	Barcode
Description	Pieces	M802	
Multi-Function Adjustable Ceiling Hole Cutter	1	M802 0305	9311963621302
HSS Replacement Blades	2	M802 0301	9311963621586
TCT Replacement Blades	2	M802 0302	9311963621593

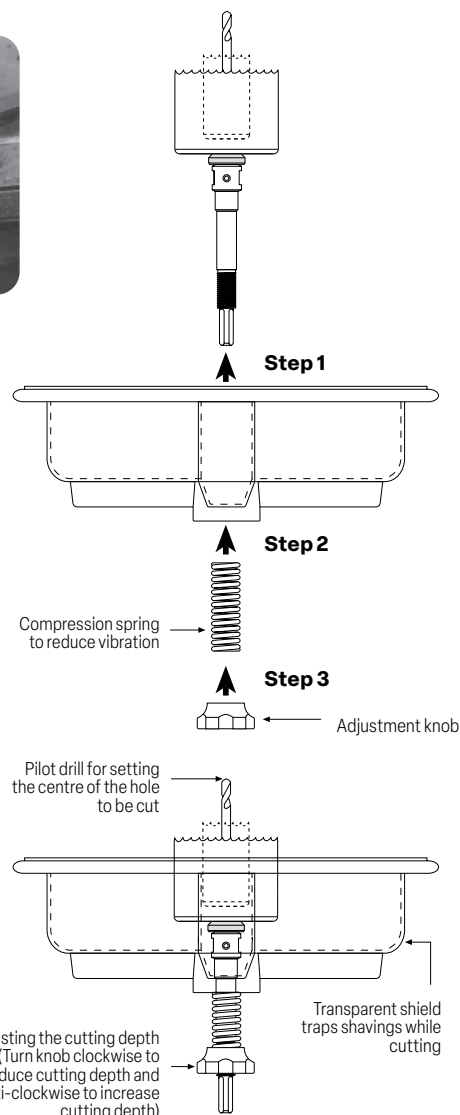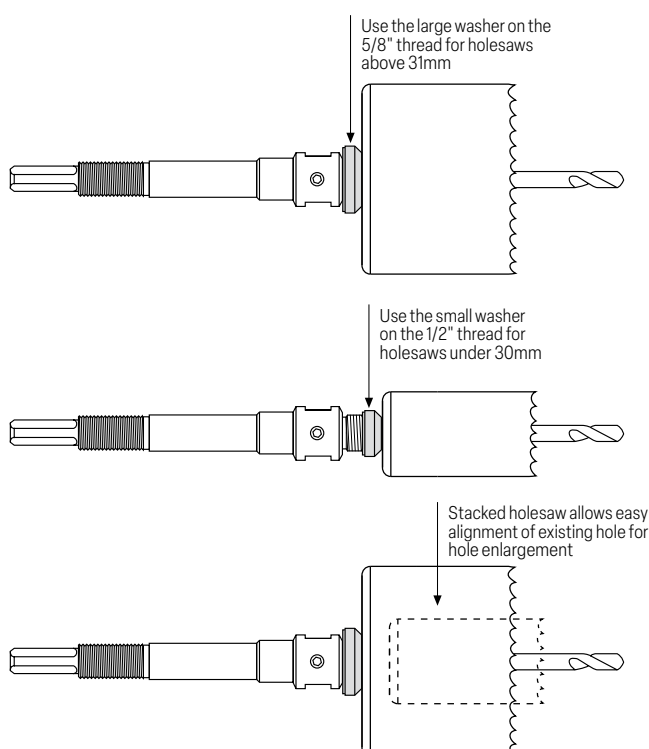

Holesaws Arbor Selection Chart

sutton

Holesaws with International Thread Standard, accepts all arbors.



Ultra Cobalt Bi-Metal - H105
Page 152



Heavy Duty Bi-Metal - H125
Page 153



Carbide Tipped - H128
Page 154



TCT Multi-Purpose - H127
Page 155



Diamond Grit - H115
Page 163

Arbors	Shank	Chuck	Thread	Pilot Drill	Material	Diameter	Length
H107 BA Arbors (Page 170)							
H107 BA1	11/32" Hex	10mm	1/2" UNF	H107 BD24	HSS	6.35mm (1/4")	82mm (3-1/4")
H107 BA2	11/32" Hex	10mm	5/8" UNF	H107 BD25	HSS	6.35mm (1/4")	104mm (4-1/8")
H107 BA3	7/16" Hex	13mm	5/8" UNF	H104 CT63	TCT	6.35mm (1/4")	105mm
H112 UA Universal Arbors (Page 170)							
H112 UA1	7/32" Hex	13mm	1/2" UNF	H112 BD24	HSS	6.35mm (1/4")	82mm (3-1/4")
H112 UA2	7/32" Hex	13mm	5/8" UNF	H112 BD26	HSS	6.35mm (1/4")	104mm (4-1/8")
H112 UA3	7/16" Hex	13mm	5/8" UNF	H104 CT63	TCT	6.35mm (1/4")	105mm
H103 QFX Quick Fit Arbors (Page 170)							
H103 QFX	7/16" Hex	13mm	5/8" UNF	H112 BD24	HSS	6.35mm (1/4")	82mm (3-1/4")
H103 QFX2	7/16" Hex	13mm	1/2" & 5/8" UNF	H112 BD26	HSS	6.35mm (1/4")	104mm (4-1/8")
				H104 CT63	TCT	6.35mm (1/4")	105mm
H112 SS Impact Arbors (Page 170)							
H112 SS1	1/4" Hex	-	1/2" UNF	H112 BD24	HSS	6.35mm (1/4")	82mm (3-1/4")
H112 SS2	1/4" Hex	-	5/8" UNF	H112 BD26	HSS	6.35mm (1/4")	104mm (4-1/8")
H110 Quick Change Arbors (Page 170)							
H110 0008	8mm Hex	10mm	1/2" UNF	H110 008H	HSS	11/32" Hex	180mm (7-1/8")
H110 0010	10mm Hex	13mm	5/8" UNF	H110 008T	TCT	11/32" Hex	180mm (7-1/8")
H110 008A	-	-	1/2" UNF	H110 010H	HSS	7/16" Hex	187mm (7-3/8")
H110 010A	-	-	5/8" UNF	H110 010T	TCT	7/16" Hex	187mm (7-3/8")
H122 Quick Release Arbors (Page 171)							
H122 4311	7/16" Hex	13mm	1/2" or 5/8" UNF	H122 6006	HSS	6.35mm (1/4")	105mm
				H122 6106	HSS	6.35mm (1/4")	125mm
				H122 6206	TCT	7mm	125mm
H115 Diamond Arbors (Page 163)							
H115 DA01	11/32" Hex	10mm	1/2" UNF	H115 PD01	TCT	8mm	63mm
H115 DA02	7/16" Hex	13mm	5/8" UNF	H115 PD02	TCT	8mm	69mm

Holesaws Arbors & Accessories

sutton


Quickfit Arbors – the strongest arbor in the market for heavy duty cutting. Designed to assist in the quick location and fitment for the complete Sutton Tools range of Holesaw products.



H103 QFX2



Power Groove Shank
For use with Sutton Tools extension shanks

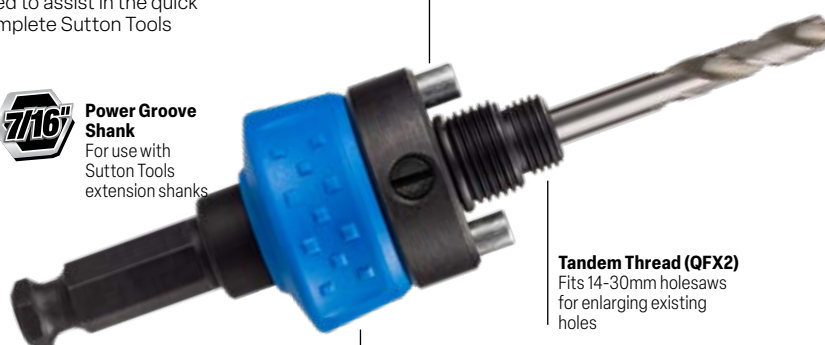

Spring Clutch Drive Pins
For a stronger torque and driving action

Tandem Thread (QFX2)
Fits 14-30mm holesaws for enlarging existing holes

Rubber Grip
Offers improved handling

Application

DIY
Trade
Industrial Application
Automotive
Electrical
Plumbing
Carpentry
Plastering
General Contracting
Woodworking
Metalworking
MRO

Product Group: C0402

Product Information						Item #	Barcode	Item #	Barcode
Code	Holesaw Size	Shank	Chuck Size	Thread	Pilot	Double Blister		Box	
	mm	inch	mm						
Quick Fit Arbors						H103			
QFX	32–152mm	7/16	13mm	5/8 UNF	BD24	H103 QFX	9311963622286		
QFX2	14–152mm	7/16	13mm	1/2 UNF 5/8 UNF	BD26	H103 QFX2	9311963625553		
BA Arbors								H107	
BA0	14-30mm	1/4 Round	10mm	1/2 UNF	BD25			H107 BA0	9311963000657
BA1	14-30mm	11/32	10mm	1/2 UNF	BD24			H107 BA1	9311963000442
BA2	32-54mm	11/32	10mm	5/8 UNF	BD24			H107 BA2	9311963000459
BA3	32-152mm	7/16	13mm	5/8 UNF	BD24	H112		H107 BA3	9311963000015
TA3	32-152mm	11/32	10mm	5/8 UNF	BD24	H112 TA3	9311963123943		
AS1 Arbor Set	14-54mm	BA1, Adaptor BAA		1/2 + 5/8	BD24	H112 AS1	9311963000107		
Universal Arbors									
UA1	14-30mm	7/32	13mm	1/2 UNF	BD24	H112 UA1	9311963556260		
UA2	32-54mm	7/32	13mm	5/8 UNF	BD24	H112 UA2	9311963556277		
UA3	32-152mm	7/16	13mm	5/8 UNF	BD24	H112 UA3	9311963556284		
Impact Arbors									
SS1	14-30mm	1/4	-	1/2 UNF	BD24	H112 SS1	9311963612751		
SS2	32-60mm	1/4	-	5/8 UNF	BD24	H112 SS2	9311963612768		
Pilot Drills								10 Pack	
BD24 6.35mm (1/4) x 82mm						H112 BD24	9311963000527	H107 BD24	9311963062822
BD25 6.35mm (1/4) x 105mm								H107 BD25	9311963000749
BD26 6.35mm (1/4) x 105mm						H112 BD26	9311963377698		
Adaptors Allows arbors PBA0, PBA1 to be used with holesaws 32-54mm (light duty)									
BAA	32-54mm	-	-	5/8 UNF		H112 BAA	9311963002583		
QF4	14-30mm	-	-	1/2 UNF	BD26	H112 QF4	9311963438924		
Grub Screw M6 by 6mm						Supplied as spare parts		H107 GS66	9311963074153

Product Group: C0408

Product Information						Item #	Barcode	Item #	Barcode
Code	Holesaw Size	Shank	Chuck Size	Thread	Pilot	Double Blister			
	mm	inch	mm						
Quick Change Arbors						H110			
QC8	14-30mm	8mm	10mm	1/2 UNF	QC8-H QC8-T	H110 0008	9311963510088		
QC10	32-152mm	10mm	13mm	5/8 UNF	QC10-H QC10-T	H110 0010	9311963510033		
Quick Change Adaptors									
QC8A	14-30mm	8mm	10mm	1/2 UNF	QC8-H QC8-T	H110 008A	9311963510095		
QC10A	32-152mm	10mm	13mm	5/8 UNF	QC10-H QC10-T	H110 010A	9311963510040		
Quick Change Pilot Drills									
QC8-H (HSS)		8mm	10mm			H110 008H	9311963510101		
QC8-T (TCT)		8mm	10mm			H110 008T	9311963510118		
QC10-H (HSS)		10mm	13mm			H110 010H	9311963510064		
QC10-T (TCT)		10mm	13mm			H110 010T	9311963510071		

Holesaws Quick Release Arbor

sutton

Sutton Tools Quick Release Arbor system takes the hassles out of changing holesaws. Our unique One-Click Multi-Fit arbor adaptor system fits all types of holesaws from 14–210mm. Now swapping out holesaws takes just seconds saving you time, money and frustration.



H122 0111



7/16"
HEX SHANK

Push Button
For quick release
and change of
holesaws



One-Click Adaptors
Available for 14-210mm
Holesaws

Application

DIY
Trade
Automotive
Electrical
Plumbing
Metalworking
MRO

Product Group: C0402

Product Information					Item #	Barcode
Description	Description	Length	Shank	Pieces	H122	
	mm	mm	inch			
Quick Release Arbor						
Quick Release Arbor			7/16	1	H122 4311	9311963612959
Quick Release Pilot Drills						
HSS Pilot Drill Short	6.35	105		1	H122 6006	9311963612997
HSS Pilot Drill Long	6.35	125		1	H122 6106	9311963612980
TCT Pilot Drill	7.0	125		1	H122 6206	9311963612973
One-Click Adaptors						
1/2" UNF (Ø14 – 30mm holesaws)				3	H122 8013	9311963613000
5/8" UNF (Ø32 – 150mm holesaws)				3	H122 8016	9311963613017
5/8" UNF (Ø40 – 210mm holesaws)				3	H122 8116	9311963613024
1/2" UNF, 5/8" UNF, 1/2" UNF & 5/8" UNF stackable				3	H122 8299	9311963613031
Quick Release Arbor Starter Kit						
1 × Quick Release Arbor with HSS Pilot Drill						
2 × One-Click Adaptors 1/2" UNF (Ø14 – 30mm holesaws)				6	H122 0111	9311963612812
3 × One-Click Adaptors 5/8" UNF (Ø32 – 150mm holesaws)						



Quick Release Arbor - with HSS Pilot Drill
H122 4311




Quick Release Adaptor -
Fits 14–30mm holesaws
H122 8013




Quick Release Adaptor -
Fits 32–150mm holesaws
H122 8016


Features

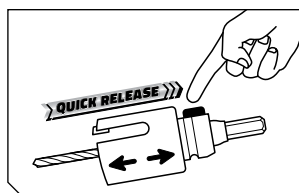

1 Swiftly replace your holesaw with one click



2 Quick plug ejection with one click

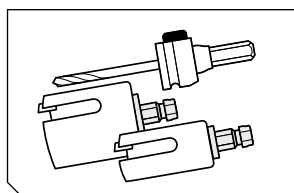

3 One arbor system to fit the complete range
of holesaw (14–210mm)



Quick Release Adaptor -
Fits 40–210mm holesaws
H122 8116

